

NOZZLE SCHEDULE									
ITEM	SIZE	RATING	TYPE	MATL	REMARKS	NOTES			
Α	3"	N.P.T.	W.F.	C.S.	PRIMARY	EMERGENCY VENT OPENING			
В	3"	N.P.T.	H.CPL.	C.S.	SECONDARY	EMERGENCY VENT OPENING			
С	2"	N.P.T.	CPL.	C.S.	-	INTERSTICE MONITOR			
D	2"	N.P.T.	W.F.	C.S.	-	-			

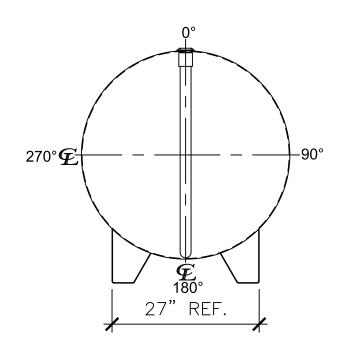

LEFT SIDE

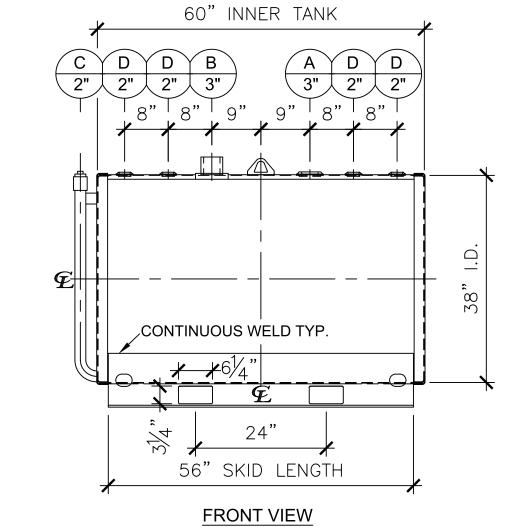

NOTES:

- A. Material: H.R. Carbon Steel.
- B. Design Pressure: Atmospheric.
- C. Design Temperature: Ambient.
- D. Built & labeled per U.L. spec. #142.
- E. Exterior: Gray primer included; see Sales Order for top coat.
- F. All fittings to be protected for shipment.
- G. Customer to verify nozzle sizes, locations, and quantities.
- H. Saddles/skids may require shimming or grouting during installation.

APPROVAL FOR CONSTRUCTION SCHEDULE A - MASTER TERMS &	SALES ORDER:			WEIGHT (LBS): 1000
CONDITION OF SALE* APPROVED AS DRAWN. APPROVED WITH NOTED CHANGES, CONSTRUCTION WILL BE SCHEDULED WHEN SIGNED DRAWING AND	All units inches unless stated otherwise Www.clarionmunicipal.com			
CONFIRMED ORDER ÄRE RECEIVED. SIGNATURE: DATE:	300 GALLON 38" I.D. x 5'-0" O.A.L. DOUBLE WALL SKID TANK			
DRIE	CUSTOMER:		-	P.O.#
	DATE: 06/07/23	SCALE:	DWG.#	DRAWN BY: WR
	00/01/23		NB00300DWS03812G	SHEET 1 OF 1