



Straw Blanket

Installation Guide

Now that you've selected the best straw blanket for your project's success, it's time to plan for installation. When properly installed, straw blankets will last longer in the field and provide reliable performance that can satisfy common erosion control compliance requirements.


Not all [Straw Blankets](#) are the same. Making sure that you have the right one for your project's specific needs is important. Contact us for assistance. (+1) 863-261-8388




Straw Blanket Installation Guide

Straw Blanket Installation Best Practices

- Step 1: Prepare the installation area by removing any debris. Rake the soil to provide a smooth surface. If the project will incorporate vegetation growth, seed and fertilize the soil.
- Step 2: Starting at the bottom of the slope, dig a 6" trench across the entire width of the installation area.
- Step 3: Unroll the straw blanket working toward the upslope, but leave an extra 6" at the base of the slope for anchoring in the trench. Staple the blanket to the base of the trench every 12". Backfill with soil, tamp down, and seed the trenched area.

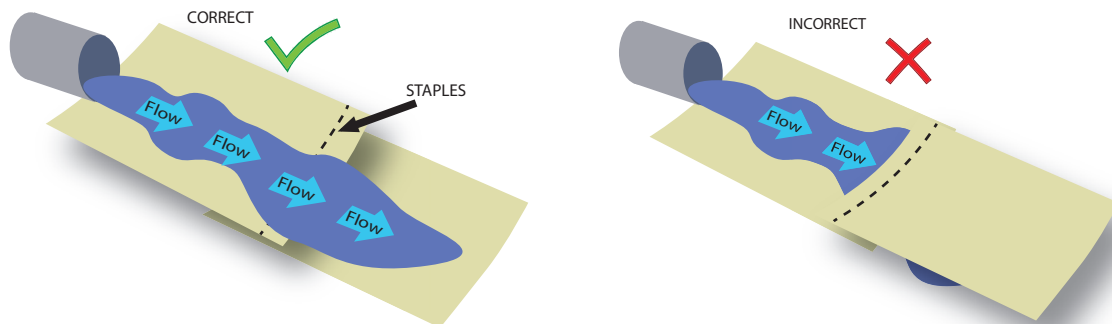


- Step 4: Roll the remainder of the straw blanket out to cover the installation area. If using multiple rolls, allow a 12" overlap, layering the overlapping blanket edges so that water flow is not obstructed. Secure the overlapped seams with staples at 5" intervals.
- Step 5: Leave 12"-24" of extra straw blanket along the top border of the installation area for anchoring. Dig a trench across the top of the installation area. Lay the straw blanket across the trench, with the excess extending out of the top of the trench. Secure the straw blanket to the bottom the trench with staples placed 12" apart. Backfill the dirt over the trench and compact it. Seed and fertilize the trench. Fold the excess blanket back over the trench and secure the blanket with staples at 12" intervals across the width of the trench.

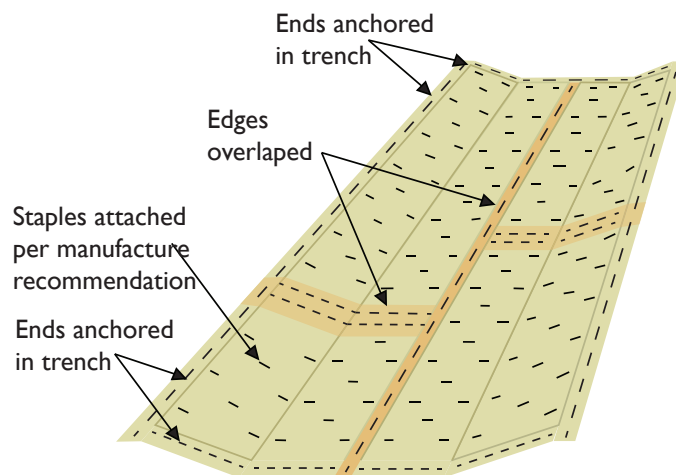

Straw Blanket Installation Guide

Step 6: Secure the remainder of the blanket at staggered intervals, following the pattern guideline below for your site's flow rate and conditions.

Staple Pattern Recommendations:

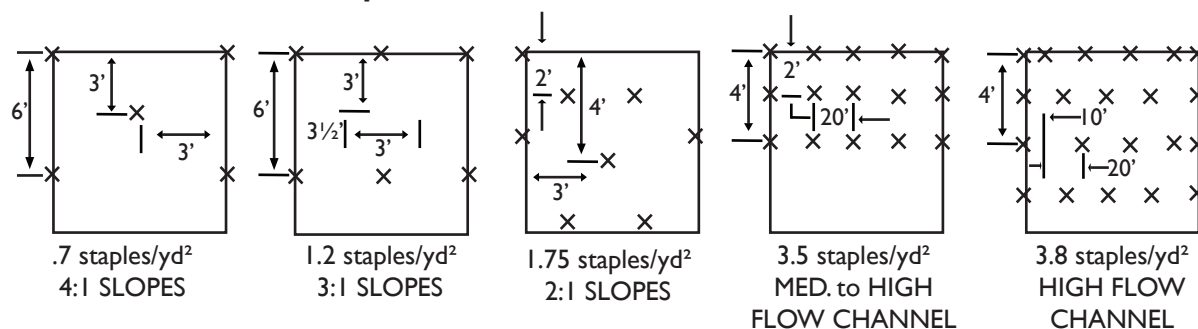

Step 7: For best performance in higher flow locations and to prevent undercutting, include checkslots at 25' to 40' intervals. Dig a small trench and anchor the blanket in the trench. While not as effective, you can instead create a checkslot by placing two rows of staples 4" apart across the entire width of the installment area. The staples on the 2nd row should be staggered from those in the first row.

Step 8: To prevent water from flowing under and eroding the soil beneath the sides of the blanket, also secure the side perimeter of the installation area in 6" x 6" trenches, stapled at 12" intervals.

Note: This is a general guideline based on best practices for installing straw blankets. Individual project site conditions and specifications can be unique and may require modifications to this installation plan.

Staple Options:

Several different styles of staples and stakes are available for attaching the straw blanket securely in place. Choose between metal staples and stakes of different sizes and gauges, or from a selection of hardwood and other biodegradable options. Contact us for assistance.

See: [Erosion Control Stakes and Staples](#).



Straw Blanket Installation Guide

Helpful Tips for Installing Straw Blankets

- ✓ Drive staples into the ground until the staple is flush with the ground surface.
- ✓ Use plenty of staples to keep blankets flat and firmly grounded.
- ✓ Do not stretch blankets.
- ✓ Do not exceed manufacturer's directions on maximum slope angle for the product.
- ✓ Overlap by at least 12 inches wherever the erosion control blanket ends and another begins.
- ✓ Uphill layers should overlap bottom layers. Staple below the flow level every 12.”
- ✓ Walk-down the blankets to help secure the blanket to the soil. Poor contact results in erosion beneath the surface and also causes lower seed germination rates.
- ✓ The blankets should be securely trenched at all ends.
- ✓ If the blanket will only cover a portion of a slope (and not the whole slope), the highest edge of the straw blanket should be placed at least one foot above the average high water level.
- ✓ Inspect the straw blanket weekly and after storm events until vegetation is established. Watch for erosion at the edges or beneath the blankets.
- ✓ Repair areas damaged by erosion by pulling back the blanket from the affected spot. Add soil, tamp it down, and reseed. Reapply the straw blanket, following installation guidelines.
- ✓ For any sections of blanket not in close contact with the soil, apply additional staples.
- ✓ Consider if additional BMPs are needed to prevent any recurring problems.
- ✓ For ditches with steep grades, consider installing check dams on top of straw blankets to reduce the impact of high-speed flows.

Other products you may be interested in:

[Check Dam](#)



[Turbidity Fencing](#)



[Wattles](#)

