


Ultra-Track Pans® Composite Models

Product Data Sheet

- + Modular, composite system – can be built and designed to almost any length depending on spill containment requirements.
- + Easy installation - minimal site preparation (no excavation) required.
- + Constructed with high strength, non-porous, corrosion resistant fiberglass for years of reliable service.
- + Low profile: 20' long x 4 7/8" high
- + Pandrol compatible
- + Rail side gasket sealing system – prevents spills from leaking between Track Pans and rails.
- + Ultra-Track Pans may be used independently, or connected to other Pans via an optional drainage manifold.
- + Drainage manifold comes standard with clean out port to allow for removal of sludge blockages, etc. Installation requires half the ballast excavation of others ensuring tie foundation integrity.

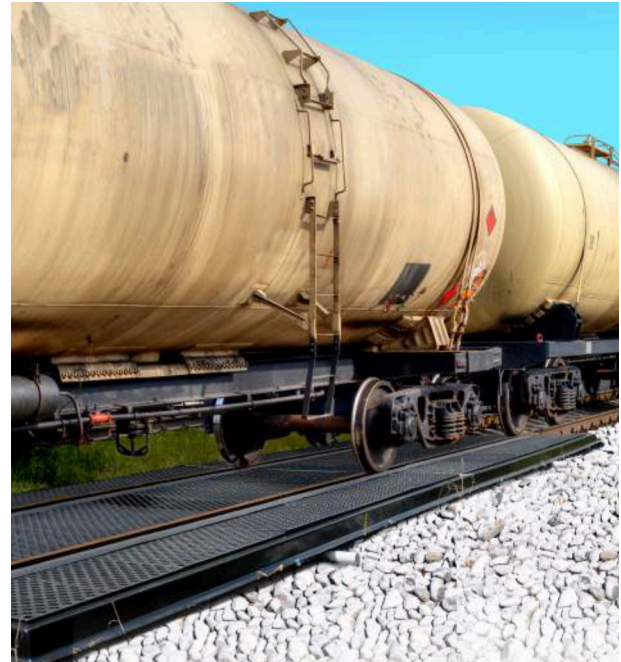

Part#	Description	Dimensions in. (mm)	Containment Capacity gal. (L)	Weight lbs. (kg)
7200	Center Pan	255 x 57¼ x 4½ (6,477 x 1,448 x 114)	209 (791) With grating: 191 (723)	177 (80) With grating: 191 (723)
7210	Side Pan	255 x 36 x 4½ (6,477 x 914 x 114)	98 (371) With grating: 89 (337)	100 (45) With grating: 89 (337)
Options: 7220 Drain Manifold Center & Sides · 7223 Drain Manifold Center Only · 7225 Rail Gasket · 0420 Grating				