




**ULTRATECH**  
INTERNATIONAL, INC

Sold by:  
**ONE**  
CLARION

# Ultra-Ground Tarp Plus

## Product Data Sheet

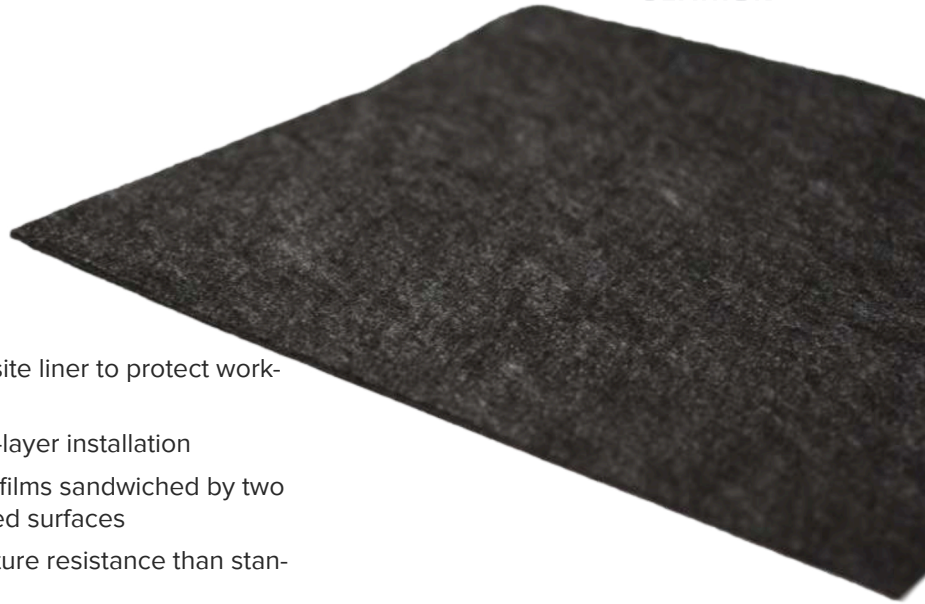

### Product Information:

- + Cover your drill site with this ultra-durable, composite liner to protect workers and the environment.
- + Goes down as a single layer — eliminates multiple-layer installation
- + Polypropylene composite consists of three barrier films sandwiched by two layers of needle-punched geotextile with heat-fused surfaces
- + Offers 3X more tear resistance and 5X more puncture resistance than standard 30-mil HDPE liners
- + Absorbs nuisance leaks, drips and spills on contact, and embedded barrier films keep all spills from reaching the ground
- + High-traction surface minimizes slip-and-fall injuries in wet or dry conditions
- + Versatile liner can be used to create secondary containment structures on-site for frac tanks, cylindrical tanks and drill cuttings
- + Welds easily for liquid-tight installation
- + Recyclable to reduce waste
- + Won't stretch or crack like HDPE.

### Ultra-Ground Tarp Plus - 130 mil

| Part Number | Description       | Dimensions ft (m)       | Approx. Weight lbs. (kg) | Color     |
|-------------|-------------------|-------------------------|--------------------------|-----------|
| 8492        | Standard Cut Size | 12 x 22 (3.66 x 6.7)    | 54 (25)                  | Dark Gray |
| 8493        | Standard Cut Size | 12 x 32 (3.66 x 9.8)    | 79 (36)                  | Dark Gray |
| 8494        | Standard Cut Size | 12 x 52 (3.66 x 15.8)   | 129 (58)                 | Dark Gray |
| 8495        | Standard Cut Size | 12 x 62 (3.66 x 18.9)   | 153 (70)                 | Dark Gray |
| 8496        | Custom            | -                       | -                        | Dark Gray |
| 8497        | Full Roll         | 12 x 450 (3.66 x 137.2) | 1,130 (513)              | Dark Gray |

# Ultra-Ground Tarp Plus

## Product Specifications

|                          |                       |
|--------------------------|-----------------------|
| Composition:             | Polypropylene         |
| Color:                   | Dark Gray             |
| UV Resistant:            | Yes                   |
| Master Roll Width:       | 12' (3.7 m)           |
| Thickness:               | 130 mil               |
| Approximate Roll Length: | 450' (137.2 m)        |
| Approximate Roll Weight: | 1,100 lbs. (499.0 kg) |
| Core dia.:               | 4" (10.2 cm)          |
| Recyclable:              | Yes                   |

### Testing Information:

| MATERIAL                         | THICKNESS   | TENSILE PROPERTIES<br>(MAX STRENGTH) |                        | PUNCTURE RESISTANCE | TEAR RESISTANCE    |    |
|----------------------------------|-------------|--------------------------------------|------------------------|---------------------|--------------------|----|
|                                  | ASTM D 5994 | ASTM D 6693/GRI, 2 ipm rate          |                        | ASTM D 4833         | ASTM D 1004 (lbs.) |    |
| Ultra-Ground Tarp Plus - 130 mil | Mils        | A-Break<br>lb/in-width               | B-Break<br>lb/in-width | (lbs.)              | A                  | B  |
|                                  | 144         | 161                                  | 100                    | 272                 | 67                 | 59 |

Top Side Absorbency: Water = 3.31 gal./100 sq. ft.; Oil = 3.42 gal./100 sq. ft.

Permittivity (ASTM D 4491) = 0

Calculated Darcy Coefficient of Permeability = 0